

RAPISCAN 628XR



Easy loading conveyor and large tunnel for X-ray screening of large baggage and parcels.

Large Parcel and Small Cargo Screening

Easy Loading Conveyor

Meets Global Regulatory Requirements

Cost Effective



With a high tunnel opening and a low conveyor, the Rapiscan 628XR is designed for customers that need easy loading and unloading of small cargo as well as baggage and large parcels during the screening process for aviation check-in, air cargo and customs inspection.

With a 1,000 mm wide by 1,000 mm high tunnel opening, the Rapiscan 628XR meets the most stringent requirements of multiple global regulatory requirements including U.S. Transportation Security Administration (TSA), French civil aviation authority (STAC), Civil Aviation Administration of China (CAAC) and Transport Canada (TC).

The Rapiscan 628XR has been approved and included on the U.S. TSA Air Cargo Screening Technology List (ACSTL) applicable to U.S. TSA Certified Cargo Screening program (CCSP) as well as the Qualified Equipment and Services Lists applicable to the Transport Canada (TC) Air Cargo Security Program (ACS).

Tunnel Opening (width x height):
1,000 x 1,000 mm (39.4 x 39.4 in)

Standard Features

- Multi Energy Imaging (4 Color)
- View Previous/Next Bag
- Manual Image Archive
- Configurable Image Processing Keys
- Baggage Counter
- Date / Time Display
- Search Indicator
- UPS (Uninterrupted Power Supply)
- Remote Workstation
- Flat Panel Monitor

Standard Image Processing Functions

- Crystal Clear™
- Black and White
- Organic / Inorganic Stripping
- Inverse Video
- High Penetration
- Pseudo Color
- Low Penetration
- Variable Edge Enhancement
- Variable Color Stripping
- Variable Gamma
- Variable Density
- Dynamic Continuous Zoom & Panning
- Fixed Zoom (64x)

Automatic Detection of Explosives

Target™ automatically detects a wide range of explosives in real time during the scanning process by visibly highlighting a potential threat on the X-ray image..

Operator-Assist Tools Enables Highest Throughput

With over 13 image processing tools and multiple automatic detection functions, the feature rich software helps the operator easily and accurately detect contraband for the highest throughput and least operator fatigue.

Industry-Leading Operator Training

Rapiscan Systems offers three comprehensive operator training programs: On-system Operator Training Program (OTP); standalone Computer Based Training software (CBT); and live in-person training with expert trainers in a one-to-one or classroom setting. All Rapiscan CBT programs are in full compliance with U.S. Transportation Security Administration (TSA) and European Union (EU) Commission Regulation 185/2010 requirements.

Regulatory Approved Threat Image Projection (TIP) and Tip Network (TIPNet)

Threat Image Projection (TIP) is the preferred operator performance training and measurement tool used by regulatory agencies worldwide. Digital images of potential threats, are interlaced with scanned object.



Rapiscan
systems

An OSI Systems Company

www.rapiscansystems.com

RAPISCAN 628XR

Physical Specifications

Dimensions:	Length: 3,802 mm (149.7 in.) Width: 1,410 mm (55.5 in.) Height: 2,198 mm (86.5 in.)
Tunnel Size:	1,000 mm (W) x 1,000 mm (H) (39.4 x 39.4 in.)
Conveyor Speed:	0.20 m/sec (39.4 ft./min)
Conveyor Load:	165 Kg (364 lbs) evenly distributed
Conveyor Height:	346 mm (13.6 in.)
Approx Weight:	Net: 1,250 Kg (2,755 lbs)
System Power:	115/230 VAC \pm 10%, 60/50Hz

X-Ray Generator and Image Performance*


Steel Penetration:	28 mm guaranteed; 30 mm typical
Wire Resolution:	38 AWG guaranteed, 40 AWG typical
Material Separation:	Low Z, Medium Z, High Z to 0.5 Z accuracy
Generator Cooling:	Sealed oil bath with forced air
Anode Voltage:	Operating at 160kV
Tube Current:	1.0 mA
Orientation:	Vertically Downward

Operating Environment

Storage Temperature:	-20°C to 50°C
Operating Temperature:	0°C to 40°C
Relative Humidity:	5 to 95% non-condensing

Health & Safety

Rapiscan Systems' cabinet X-ray products comply with all applicable US FDA and equivalent international regulatory agency requirements, contained in the cabinet X-ray radiation safety performance standard [21 CFR 1020.40] and the general performance standard [21 CFR Part 1010]. Rapiscan Systems certifies each cabinet X-ray product has a maximum radiation emission leakage of less 1 μ Sv/hr (0.1 mR/hr) from all external surfaces of the cabinet X-ray system.

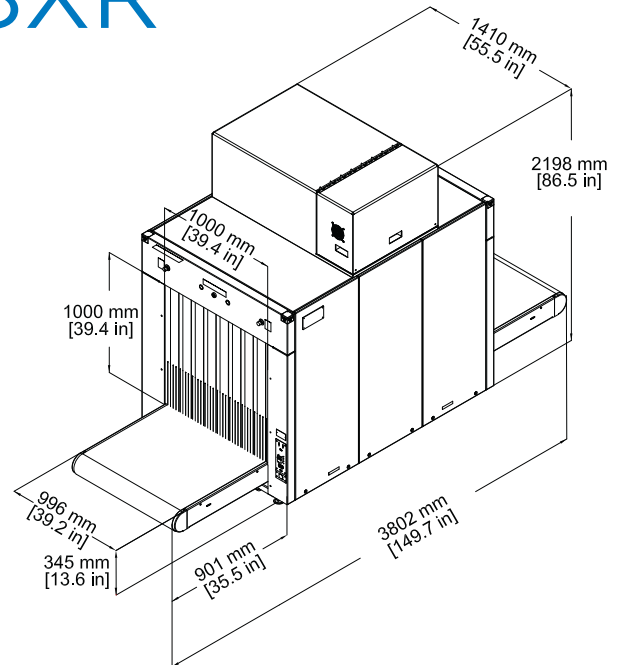

Options and Accessories

*Target™ / Interactive Target™
(Automatic detection of solid explosives)

Density Threshold Alert (DTA)

Threat Image Projection (TIP)

Threat Image Projection Network (TIPNet)

Automatic Image Archiving

Manual Scan

Operator Training Program (OTP)

Computer Based Operator Training (CBT)

Network Display Station (NDS)

Operator Pedestal

Foot-mat

Optical Operator Presence Sensor

Conveyor Accessories

SmartCard Login

Power Conditioner

Printer Kit

AMERICAS, CARIBBEAN

2805 Columbia Street
Torrance, California 90503
UNITED STATES of AMERICA
Tel: +1 310-978-1457
Fax: +1 310-349-2491

EUROPE, MIDDLE EAST, AFRICA

X-Ray House
Bonehurst Road
Salfords
Surrey RH1 5GG
UNITED KINGDOM
Tel: +44 (0) 870-7774301
Fax: +44 (0) 870-7774302

ASIA

240 Macpherson Road
#07-01 Pines Industrial Building
Singapore 348574
SINGAPORE
Tel: +65-6846-3511
Fax: +65-6743-9915

EMAIL

sales@rapiscansystems.com

WEB

www.rapiscansystems.com

Rapiscan
systems

An OSI Systems Company

ONE COMPANY - TOTAL SECURITY



Rapiscan Systems is
ISO 9001:2008 Certified

www.rapiscansystems.com